


# LD Series

## 5-100 kN Materials Testing



# Specifications

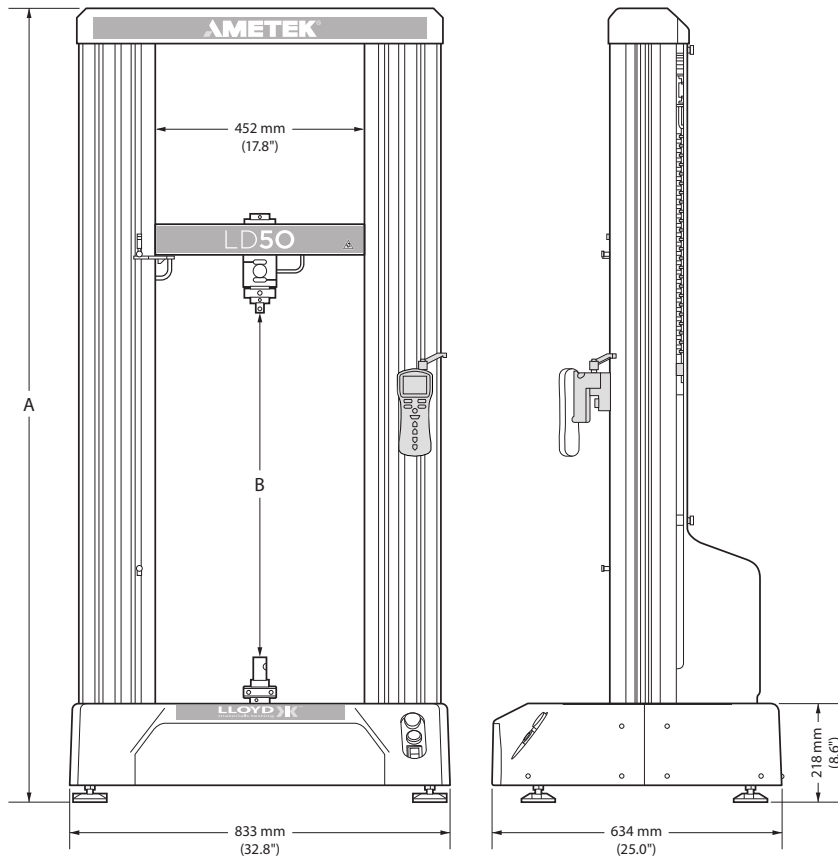

A	Standard Machine Height	1728 mm / 68 in
	Extended Machine Height	2363 mm / 93 in
B	Standard Crosshead Travel	1070 mm / 42 in
	Extended Crosshead Travel	1669 mm / 65.7 in

Force Capacity	
LD5	5 kN / 1124 lbf
LD10	10 kN / 2248 lbf
LD30	30 kN / 6744 lbf
LD50	50 kN / 11240 lbf
LD100	100 kN / 22480 lbf

Crosshead Speed Range	
LD5	0.0001 to 1270 mm/min / 0.000004 to 50 in/min
LD10	0.0001 to 1270 mm/min / 0.000004 to 50 in/min
LD30	0.0001 to 1000 mm/min / 0.000004 to 40 in/min
LD50	0.0001 to 500 mm/min / 0.000004 to 20 in/min
LD100	0.0001 to 250 mm/min / 0.000004 to 10 in/min

Return Speed	
LD5	1270 mm/min / 50 in/min
LD10	1270 mm/min / 50 in/min
LD30	1000 mm/min / 40 in/min
LD50	650 mm/min / 26 in/min
LD100	325 mm/min / 10 in/min

Speed Accuracy	
0.1%	

Crosshead Travel	
Standard Height	1070 mm / 42 in
Extended Height	1669 mm / 65.7 in

The LD100 is available in only a standard height version.

Extension Resolution		
LD5/10	0.000121 μm	per encoder count
LD30	0.000214 μm	per encoder count
LD50	0.000354 μm	per encoder count

μm = micron.

Load Cell	
Load Cell Accuracy	< +/- 0.5% of reading down to 1/100 of load cell capacity
Resolution	32-bit A/D converter
Min. Load Resolution	1 part in 10 <sup>9</sup>

Extensometer Inputs	
Analog and Digital	

Data Transfer Rate to PC	
1 kHz	

Supply Voltage	
207-253 VAC at 50 Hz or 103.5-126.5 VAC at 60 Hz	

Load Measuring System	
EN ISO 7500:2015 Class 0.5 ASTM E4	

Software	
NEXYGENPlus 4	

Weight	
225 kg / 496 lb	

Operating Temperature	
10 to 40° C / 50 to 104° F	

Control Modes	
Position, Load Rate, and Strain Rate control	

Width Between Columns	
452 mm / 17.8 in	

**USA, Florida**  
Tel +1 (800) 527 9999  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**India**  
Tel +91 22 2836 4750  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**Singapore**  
Tel +65 6484 2388  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**China, Shanghai**  
Tel +86 21 5886 5111  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**China, Beijing**  
Tel +86 21 8526 2111-19  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**United Kingdom**  
Tel +44 (0) 1243 833 370  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

**France**  
Tel +33 (0) 30 68 89 40  
[general.lloyd-instruments@ametek.fr](mailto:general.lloyd-instruments@ametek.fr)

**Germany**  
Tel +49 (0) 2159 9136 510  
[info.mct-de@ametek.de](mailto:info.mct-de@ametek.de)

**Denmark**  
Tel +45 4816 8000  
[test.sales@ametek.com](mailto:test.sales@ametek.com)

For detailed specifications  
go to the Data Sheet at [ametekttest.com](http://ametekttest.com)

**LLOYD**  <sup>TM</sup>  
**materials testing**

No part of this document may be reproduced or modified in any form or by any means, electronic or mechanical, without express written permission from AMETEK STC.

©2017 AMETEK Incorporated

**AMETEK**<sup>®</sup>  
SENSORS, TEST & CALIBRATION